

MIC® Tight-Buffered Cable, Riser 24 F, 50 μm multimode (OM4)



Part Number:
024T81-33190-24

Corning MIC® riser cables are designed for use in riser and general purpose environments for intrabuilding backbone and horizontal installations. These multifiber cables use 900 μm buffered fibers to enable easy, consistent stripping and facilitate termination. The fibers are surrounded by dielectric strength members and protected by a flame-retardant outer jacket. The all-dielectric cable construction requires no grounding or bonding, making these cables ideal for routing inside buildings including riser shafts, to the telecommunications rooms and workstations. The MIC Riser Cables meet the application requirements of the National Electrical Code® (NEC®) Article 770 and the ICEA S-83-596 test criteria. They are OFNR and FT-4 listed for riser and general-purpose use.

Features and Benefits

900 μm buffered fibers


Easy, consistent stripping

All-dielectric construction


Requires no grounding or bonding

Flame-retardant jacket

Rugged and durable

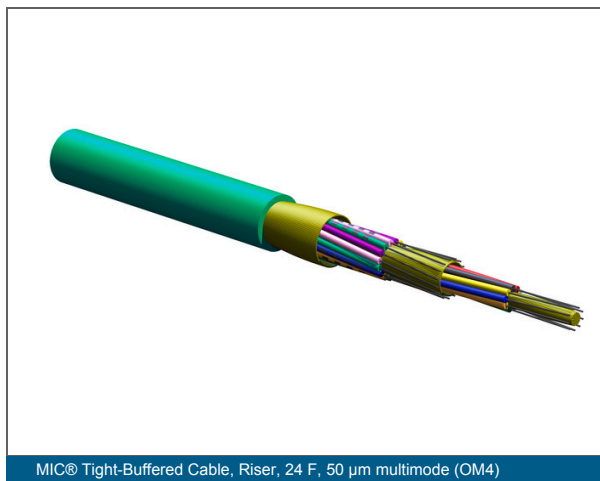

MIC® Tight-Buffered Cable, Riser, 24 F, 50 μm multimode (OM4)

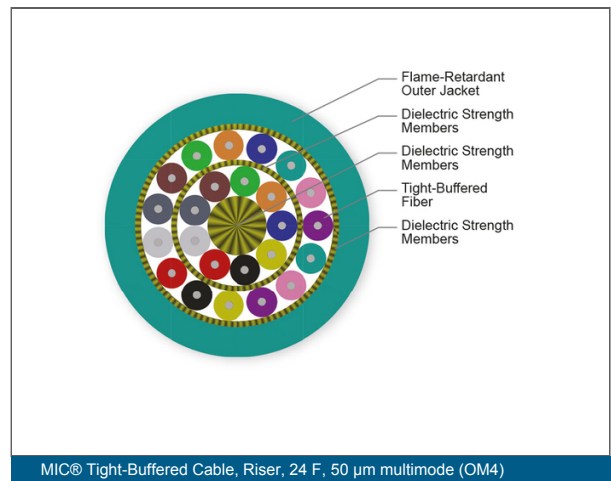

MIC® Tight-Buffered Cable, Riser, 24 F, 50 μm multimode (OM4)

MIC® Tight-Buffered Cable, Riser 24 F, 50 µm multimode (OM4)



Specifications

General Specifications	
Installation Methods	Horizontal, Riser
Cable Type	Tight-Buffered
Environment	Indoor
Product Type	Distribution
Fiber Category	50 µm MM (OM4)
Flame Rating	Riser (OFNR)
Cable geometry	Round

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	National Electrical Code® (NEC®) OFNR, UL-1666, CSA FT-4
Design and Test Criteria	ICEA S-83-596

Environmental Conditions	
Temperature Range, Installation	-10 °C to 60 °C (14 °F to 140 °F)
Temperature Range, Operation	-20 °C to 70 °C (-4 °F to 158 °F)
Temperature Range, Storage	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Yarn
Fiber Count	24
Outer Jacket Color	Aqua
Outer Jacket Material	Flame-retardant
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Tensile Strength Elements and/or Armoring - Layer 2	Dielectric strength members

MIC® Tight-Buffered Cable, Riser 24 F, 50 µm multimode (OM4)

CORNING

Cable Design

Tight Buffer Color, Layer 1	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow
Tight Buffer Color, Layer 2	Violet, Rose, Aqua, Blue*, Orange*, Green*, Brown*, Slate*, White *, Red*, Black*, Yellow*, Violet*, Rose*, Aqua*
Flame Rating	Riser (OFNR)

Mechanical Specifications

Max. Tensile Strength, Long-Term, ≤12F	200 N
Max. Tensile Strength, Long-Term, >12F	400 N
Max. Tensile Strength, Short-Term, ≤12F	660 N
Max. Tensile Strength, Short-Term, >12F	1320 N
Min. Bend Radius Installation	110.25 mm
Min. Bend Radius Operation	73.5 mm
Nominal Outer Diameter	7.35 mm

Dimensions

Cable Weight	47 kg/km
--------------	----------



Corning Comunicacoes Opticas • Estrada do Camorim 633 • Jacarepagua CEP 22780-070 • Rio De Janeiro, RJ Brazil
+55 21 3416 5150 • FAX: +55 21 2441 2037 • www.corning.com/opcomm/csa

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.