

CCH Cassette Termination and Slack Storage, empty, no splice tray, for one CCH adapter panel



**Part Number:
CCH-CF**

CCH cassettes enable fast field termination and easy modular management of connectorization within the housing. The pass-through splicing cassette enables through splicing in the CCH cassette footprint.


A CCH termination and slack storage cassette option with no splice tray, suitable for use with field-installable connectors, is also available.

Each cassette is shipped with one rail for use with CCH-01U/2U/3U housings and two rails used with CCH-04U and the WCH-02P/4P/6P housings. Grommets and cable ties for strain relief, and protective braided tubing for incoming cable are also included.

Features and Benefits

Manage cable slack for a CCH panel in a modular footprint

Fast, easy and reliable initial routing, and quick, simple reaccess for moves, adds and changes (MACs)

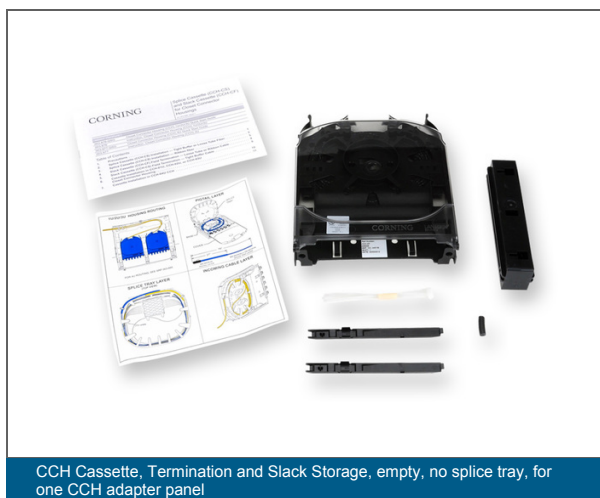

CCH Cassette Termination and Slack Storage, empty, no splice tray, for one CCH adapter panel



Specifications

General Specifications	
Product Type	Cassettes
Mounting Type	Rack-mount, Wall-Mountable
Application	Data Center, Enterprise Networks

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	Meets ANSI/TIA/EIA-568A and 606

Environmental Conditions	
Temperature Range, Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Design	
Housing Type	CCH
Panel or Module Type	CCH

Ordering Information	
Product Number	CCH-CF
Shipping Weight	0.5 kg
Units per Delivery	1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2026 Corning Optical Communications. All rights reserved.